


COIL SPECIFICATION (at 20 °C)

Nominal Voltage (VDC)	Pick-up Voltage VDC(max.)	Drop-out Voltage VDC(min.)	Coil resistance (Ω) $\pm 10\%$	Nominal oprating Power(W)	Max allowable Voltage
3	2.25	0.15	25	0.36	130% of nominal Voltage
5	3.75	0.25	69		
6	4.50	0.30	100		
9	6.75	0.45	225		
12	9.00	0.60	400		
18	13.5	0.90	900		
24	18.0	1.20	1,600		
48	36.0	2.40	6,400		


DIMENSIONS

Unit:mm

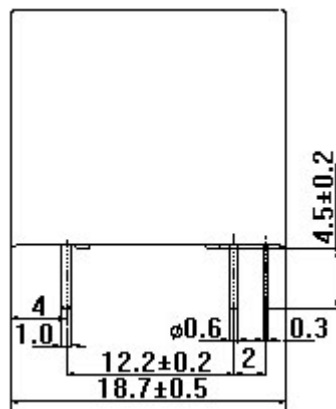


SRD-S-1XXD

BOTTOM VIEW

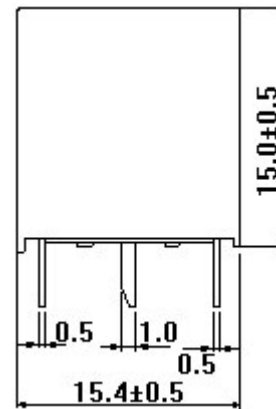


BOTTOM VIEW


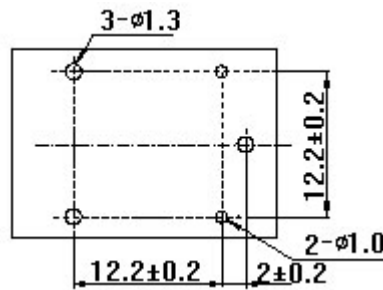


SRD-S-1XXDM

BOTTOM VIEW



BOTTOM VIEW

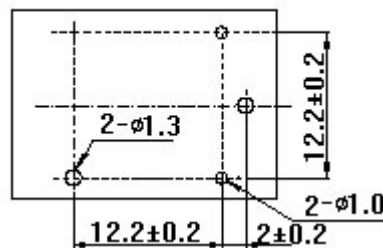

BACK NEXT